

## Technical data sheet


# 225C-024T-05

## Continuous control rotary drive without spring return

### Description

Actuator for adjusting air dampers of 90° angle of rotation to be used in HVAC installations.

- Torque Motor            5 Nm
- Nominal Voltage       24 VAC/DC
- Control                    Continuous control  
DC 0(2)...10 V
- Damper size            up to approx. 1 m<sup>2</sup>
- Damper coupling       Clamp  
∅ 8-12 mm / Ø 8-16 mm

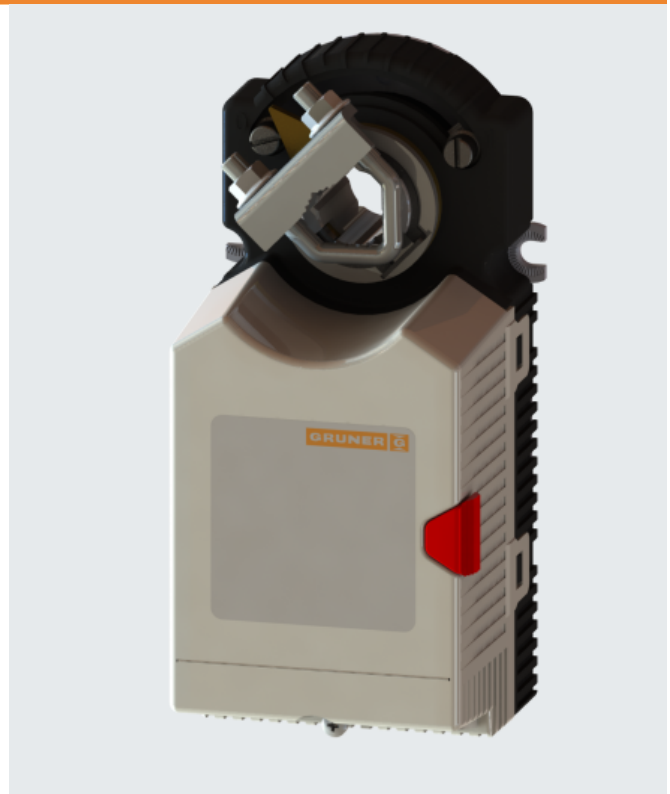

### Technical data

<b>Nominal voltage</b>	Nominal voltage	24 VAC/DC
	Nominal voltage range	19...29 VAC/DC
	Power consumption Motor (Motion)	1,5 W
	Power consumption Standby (end position)	1,0 W
	Wire sizing	3,0 VA
	Control	Continuous control 0(2)...10 VDC / (0)4...20 mA / Ri >100 kΩ
	Position feedback	0(2)...10 VDC, max 5 mA
	Auxiliary switch	-
	Contact load	-
	Switching point	-
	Connection Motor	screw terminals, on cable 0,5...1,5mm <sup>2</sup>
	Connection Auxiliary switch	-
	Connection Position feedback	-
Connection GUAC	-	
<b>Functional data</b>	Torque Motor	> 5 Nm
	Synchronised speed	-
	Direction of rotation	selected by switch
	Manual override	Gearing latch disengaged with pushbutton, self-resetting
	Angle of rotation	0° ... max. 95° Can be limited with adjustable mechanical end stop min 20°
	Running time Motor	60...120 s / 90°
	Sound power level Motor	< 35 dB(A)
	Damper coupling	clamp ∅ 8-12 mm / Ø 8-16 mm

## Technical data

<b>Functional data</b>	Position indication	mechanical with pointer
	Service life	> 60'000 cycles (0° - 95° - 0°)
<b>Safety</b>	Protection class	III (low voltage safety current)
	Degree of protection	IP 52 (Cable port downwards)
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	RoHS	CE (2011/65/EU)
	Mode of operation	Typ 1 (EN 60730-1)
	Rated impulse voltage	0,8 kV (EN 60730-1)
	Control pollution degree	3 (EN 60730-1)
	Ambient temperature Normal operation	-30°...+50°
	Storage temperature	-30°...+80°
	Ambient humidity	5...95% r.F., non- condensating (EN 60730-1)
	Maintenance	maintenance free
	<b>Dimensions/ Weight</b>	Dimensions
Weight		ca. 530 g

## Operating mode / Properties

### Operating mode

Through connecting the power supply to 1+2 and a reference signal Y to 3 of [0(2)...10VDC], moves the actuator to its specified position. The actual damper position 0...100% is a feedback signal U for example to share the signal with other actuators.

The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.

### Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

### Manual override


Manual override is possible with the self-resetting pushbutton (the gearing latch remains disengaged as long as the pushbutton is pressed)

### Mode- switch


DIP-Switch under the case cover

### Adaption drive

- Adaption on angle of rotation < 90°
- Actuator power-off
- Setting the mechanical end stops
- Actuator power-on
- Adaption to enable
- Actuator adaption on angular range
- Adaption to disable
- “Y” refers to the measured angular range

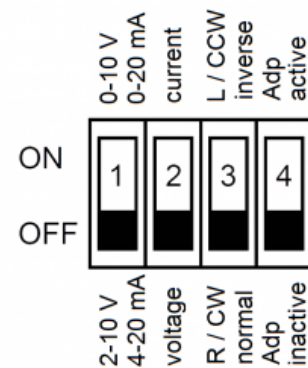

## Connection / Safety remarks

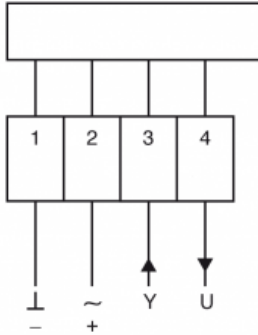**Safety remarks**

- Connect via safety isolation transformer
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

